
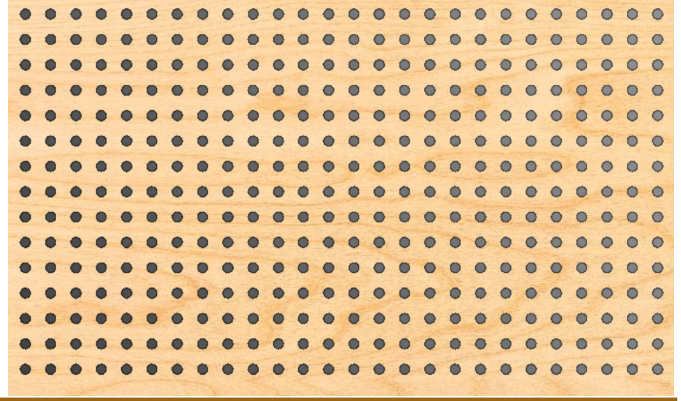



perf 6.4/6.4/2

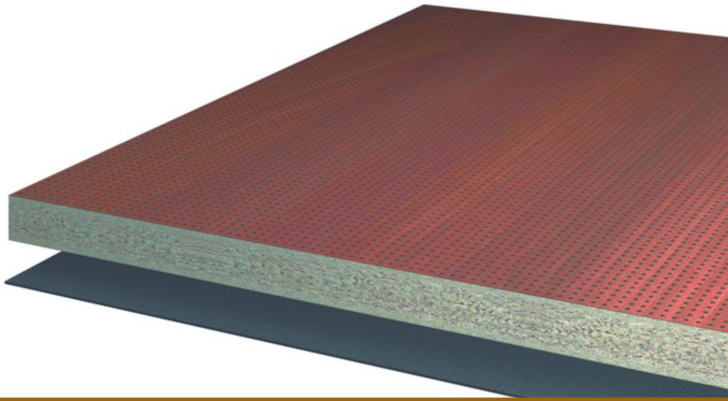

Construction

- Surface Options:** Wood Veneer, High Pressure Laminate, Lacquer/ Paint
- Substrate Options:** 3/4" (19mm) MDF is Standard. Also available in Particleboard, FR MDF or Proofire Non Combustible
- Edge Options:** Wood, ABS, HPL, Custom
- Applications:** Wall Panels, Ceilings, Clouds. Baffles and Furniture


Perforation: 6.4/6.4/2




Acoustic Key Values

NRC: 0.75 SAA: 0.75 aw: 0.60

TEST REPORT #: P-091048-22

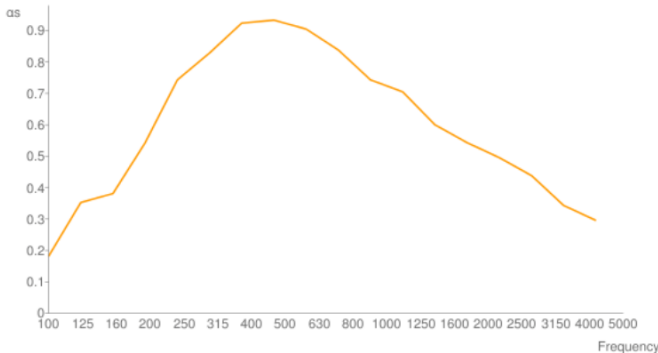

Frequency	as
100	0,19
125	0,37
160	0,40
200	0,57
250	0,78
315	0,87
400	0,97
500	0,98
630	0,95
800	0,88
1000	0,78
1250	0,74
1600	0,63
2000	0,57
2500	0,52
3150	0,46
4000	0,36
5000	0,31

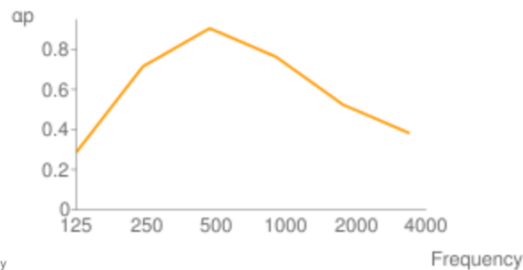

Frequency	ap
125	0,30
250	0,75
500	0,95
1000	0,80
2000	0,55
4000	0,40

The measurements were determined and evaluated in accordance with EN ISO 354 "Measurement of sound absorption in a reverberation room", 2003 edition. The absorption coefficient values illustrated below apply to a cavity of 50 mm and additional attenuation provided by a 30 mm layer of acoustic mineral wool.